

Crynant WwTW Quality Scheme

largest biological contactor & reed bed in Wales installed

by Joe Merry MEng, MChemE

Dwr Cymru Welsh Water (DCWW) have completed an upgrade of the Waste Water Treatment Works at Crynant to meet a tighter effluent consent standard using a 'low carbon' process solution. Crynant WwTW provides full treatment for all incoming flows up to 90 l/s. The works serves a design population of 5680 PE. The new discharge consent (10mg/l BOD, 15mg/l SS and 5 mg/l AmmN) came into effect on 1st April 2008. The Standard solution for this works discharge upgrade would have been the provision of an energy intensive activated sludge plant followed by sand filtration, including inter-stage pumping. However, in line with DCWW's Sustainable Strategy which includes responding to climate change, a low carbon footprint solution comprising the largest rotating biological contactor RBC and reed bed installation in Wales has been installed.



2 No. Reed beds have been provided for effluent polishing

courtesy Dwr Cymru Welsh Water

Imtech Process Sector Coverage

Imtech Process is an engineering and delivery contractor dedicated to providing value - added services on a wide range of projects. We provide a range of services including programme management, feasibility study, detailed design, procurement, construction, commissioning, after care (plant optimisation) and O&M. Our areas of expertise includes the following:

SLUDGE

■ We provide effective, reliable and sustainable treatment and help reduce disposal needs in accordance with ever tightening standards. Our strategic approach includes asset optimisation plans.

WASTEWATER

■ We enable new regulatory and legislative requirements to be met through our proven capability in refurbishment and upgrading of existing assets or the design and build of new treatment works.

WASTE

■ We can deliver fully integrated process solutions for the infrastructure needs resulting from the legislative drivers for new In Vessel Composting, Anaerobic Digestion, MBT and Energy from Waste plants.

WATER

■ We provide high quality drinking water solutions, through our expertise in the management of design, procurement and construction of water treatment projects.

CHP / BIOSOLIDS

■ We utilise enhanced biosolids and waste recovery solutions that can deliver increased Combined Heat and Power (CHP) capacity, providing clients with a range of cost and environmental benefits.

INDUSTRIAL

■ We enable increased capacity and viable reuse through focus on best value and whole-life costs. These can be implemented across a wide range of areas including food, beverage, oil contamination, leachates and paper effluents. All to meet stringent regulatory and IPPC drivers.

Sector Coverage





Operating throughout the UK and Ireland, Laser Special Projects is a leading multi-sector specialist contractor. Our expert knowledge of legislative requirements, innovative technologies and proven systems ensures a comprehensive service from consultation, assessment and specification, through to delivery of the finished project.



Laser Special Projects

Specialists in Water Engineering



Laser Special Projects

Henwick Mill, Martley Road, Lower Broadheath, Worcestershire, WR2 6RG

T 01905 742750 | E gemma.gunter@laser-group.co.uk | www.laser-group.co.uk



Kemys Way, Swansea Enterprise Park
Morrison, Swansea SA6 8QF
Tel 01792 797790
Fax 01792 781164
email: martyn@wwalters.co.uk
website: www.wwalters.co.uk

Mechanical Engineers

- Machining/ Fabrication Services
 - Plant installations
- Pipework - Ductile, ABS, PVC and specialist Stainless Steel Pipework systems
 - Maintenance, Inspection & Testing
- all types of lifting equipment to LOLER & PUWER regs
- Design, Fabrication & Installation - all types of lifting structures

"full service to the water industry".

Detailed design, procurement, construction and commissioning were carried out by Morrison Construction (civil) and Imtech Process (process and M& E) working as part of the Welsh Water Asset Management Alliance and in specifically with the operator Kelda Group.

Process Design

Previously, the treatment process at Crynant comprised preliminary treatment, primary settlement, biological filtration and humus settlement to achieve compliance with a discharge consent of 16 mg/l BOD and 28mg/l SS. The poor condition of the old process units and the imposition of a new discharge consent, including a first time ammonia standard, necessitated a complete redesign of the treatment process.

However, process selection and design was constrained by several complicating factors including high infiltration and difficult ground conditions for construction. The topography of the site is very flat with an estimated drop of only 2.5-3.0m from the inlet works to the outfall.

The existing rectangular primary settlement tanks had no effective method of sludge collection and removal which made de-sludging a manual labour-intensive process. Two of these tanks were modified to operate as storm tanks. A re-suspension pump was installed in each tank to provide an effective cleaning system.

The existing circular storm tank was modified for re-use as a primary settlement, but could only accommodate flows up to 50 l/s, so that all flows above this value bypass the primary stage. It was felt that the provision of additional settlement capacity (either new or modifying existing rectangular tanks) did not justify the considerable associated cost.



Storm tank as Primary Settlement tank & 6 RBC's to achieve carbonaceous oxidation & nitrification

courtesy Dwr Cymru Welsh Water

For biological treatment, activated sludge processes were not favoured because treatment of dilute wastewaters can result in sludge settle ability problems. Nitrifying biological filters (using plastic media) followed by tertiary sand filtration were considered; however, this option required construction of 2No. new biological filters and 2No. new humus settlement tanks, and required at least one stage of intermediate pumping.

The preferred process solution was to use Rotating Biological Contactors (RBCs) to achieve carbonaceous oxidation and nitrification, followed by tertiary downflow reed beds for 'effluent polishing'. These processes have relatively low hydraulic losses across them, meaning that no intermediate pumping stage was required. Also, the ability of the reed bed to cope with relatively high solids loads meant that only 1No. new humus settlement tank (15m diameter) was constructed for flows up to 50 l/s, with higher flows being passed to the reed bed without settlement.

The other main reasons for preferring the reed bed option were slightly lower Capex and Opex, a relatively simple construction scheme, and a process that was considered 'green'. However, to justify the 'green' tag, quantification of the greenhouse gas emissions

for the different options was required. (see next page).

There are 6No RBCs (supplied by Kee Process) operating in parallel, each unit comprising 6 banks of 4.5m diameter discs. This is believed to be the largest RBC installation in Europe.

Tertiary treatment comprises 2No reed beds each measuring 16m by 75m by 1m (deep). Only one bed operates at a time; typically, the duty bed is operated for two weeks at a time during which time the standby bed is allowed to rest, encouraging the biodegradation of any accumulated solids. To minimise the footprint required, downflow reed beds were used. A network of pipes is used to distribute the flow across the entire surface of whichever bed is in operation. Humus sludge is pumped back for co-settlement in the primary settlement tank. A new sludge storage tank (200m³ capacity) has also been provided.

Quantification of carbon footprint

An initial comparative assessment considered only emissions associated with cement (construction) and electricity consumption. This indicated that the reed bed option had lower emissions than the biofilter option (particularly for construction) and both had

LEWIS

CIVIL ENGINEERING



This water looks clean

But sometimes nature needs a little help






Mwyndy Cross Industries, Cardiff Road, Pontyclun, Rhondda Cynon Taff,
CF72 8PN, Tel: (01443) 449200
enquiries@lewis-ltd.co.uk www.lewis-ltd.co.uk





Circular storm tank modified for re-use as Primary Settlement Tank photo courtesy Dwr Cymru Welsh Water

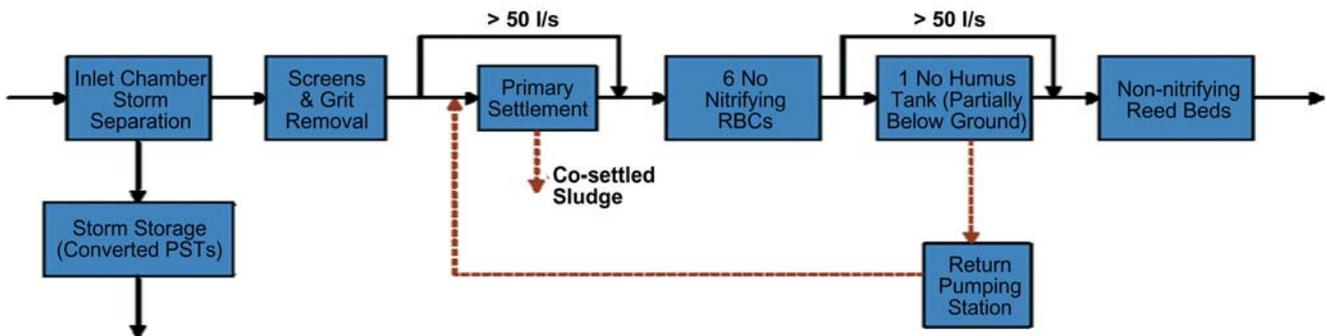

Flow diagram of Crynant WwTW

courtesy of Dwr Cymru Welsh Water

Treatment Process	Consent	Greenhouse Gas Emissions (Tonnes of CO ₂ e/yr)					
		TOTAL	On Site		Off Site		
			Electricity Consumption	Other	Sludge Transport	Sludge Treatment	Sludge Disposal
Nitrifying RBCs & Tertiary Reed Bed	10 mg/l BOD 15 mg/l SS 5 mg/l AmmN	437	99	45	1	218	74
Nitrifying ASP & Tertiary Sand Filters	10 mg/l BOD 15 mg/l SS 5 mg/l AmmN	487	135	36	1	240	75
Biological Filters (Existing Process)	16 mgBOD/l 28 mgSS/l	375	66	36	1	199	73

Table quantifying the Carbon Footprint

courtesy of Dwr Cymru Welsh Water

significantly lower emissions than for a conventional nitrifying AS plant with tertiary filtration.

NOTE This exercise excluded embodied emissions associated with construction.

The absolute carbon footprint was also quantified for the existing process, the preferred solution and the nitrifying AS plant, and the results are tabulated above.

Note: *The Editor & Publishers wish to thank Joe Merry, Senior Process Engineer working with Imtech Process Ltd, for producing the above article for print.* ■